




# SYMBOL CARD

**description** One-sided coated Board (SBS, GZ); made up of ECF (elemental chlorine free) ecological pulp, coated on one side with double blade coating with a satin finish. Available in new Premium White colour.

**range**

size	grain	substance
72x102	LG	210 240 270 300 330

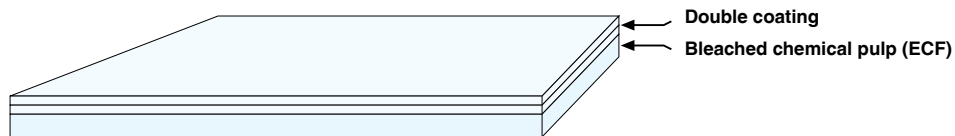

**technical features**  
standard/instrument  
unit of measure

substance	thickness	smoothness*	stiffness Taber 15°	
ISO 536	ISO 534	ISO 8791-2	ISO 2493	
g/m <sup>2</sup>	µm	ml/min	mNm	
			long±10%	cross±10%
210 ± 4%	250 ± 10	380 ± 20	3,9	2,6
240 ± 5%	285 ± 10	300 ± 20	6	3,8
270 ± 5%	325 ± 10	285 ± 20	9,3	5,5
300 ± 5%	360 ± 10	285 ± 20	11,3	7,3
330 ± 5%	400 ± 10	300 ± 20	15,3	9,5

Whiteness - ISO 2470 (R457) - 104% ± 2  
Relative Humidity 50% ± 5  
\* Uncoated side

**ecological features**



ELEMENTAL  
CHLORINE  
FREE  
GUARANTEED



**notes** The product is completely bio-degradable and recyclable. Special runs available upon request.

The company reserves the right to modify the technical characteristics of the products on the basis of market requirements



Symbol Card is excellent for packaging, covers, postcards, brochures, promotional material, CD cases and similar applications.

applications

Can be used without problems with the main printing systems: letterpress, offset, blind embossing, hot foil stamping, thermography and screen-printing. For offset printing, the characteristics of the coated side are comparable to our Symbol Freelifa Satin, and the uncoated side is designed to provide good printability, also with solid colours.

printing suggestions

Good results can be expected with all the main converting process: cutting, die-cutting, scoring, glueing, varnishing and plastic lamination.

converting suggestions



SYMBOL™